



DOUBLE-HANDLE WALL-MOUNTED BASIN FAUCET

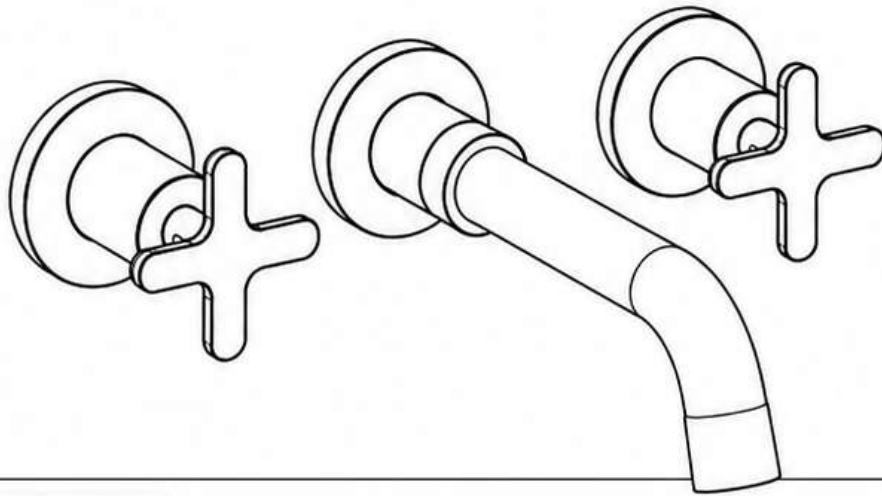


INSTRUCTIONS FOR USE:

- 1** The internal structural parts of the faucet have been professionally assembled, inspected, and tested at the factory. Do not disassemble it on your own, as this may affect the functionality and lifespan of the faucet.
- 2** Before installing the faucet, be sure to open the main valve to flush out any debris such as iron filings or hemp fibers from the water pipes. This prevents clogging and ensures proper water flow and functionality.
- 3** Install the faucet according to the product installation diagram to ensure correct installation. Do not force installation, as this may damage the faucet components.
- 4** The faucet must be correctly connected to the cold and hot water supply lines. When facing the faucet, the left side connects to hot water, and the right side connects to cold water.
- 5** After installation, check all connections to ensure they are tight and there is no leakage at the interface between the faucet and water pipes. Then, open the main water inlet valve to flush the pipes for one minute.
- 6** For any questions regarding the use or installation of the faucet, please contact the dealer.

PRODUCT DETAILS:

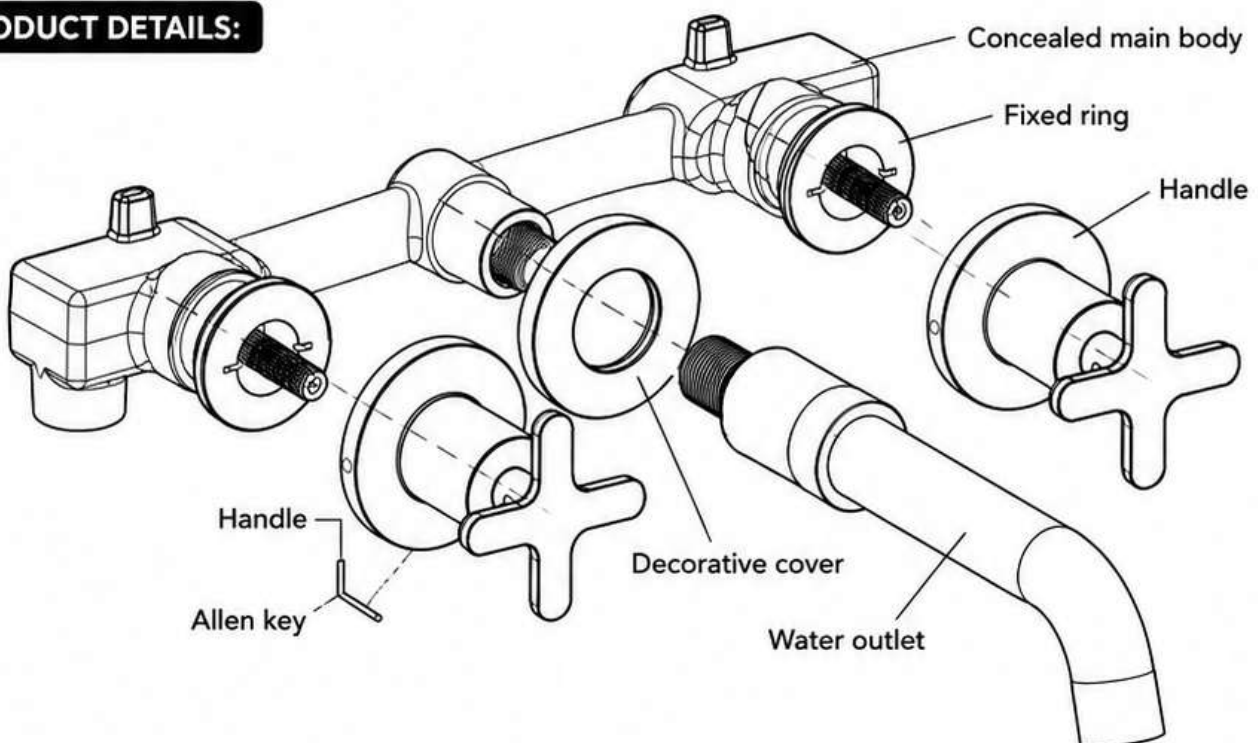

INSTALLATION STEPS

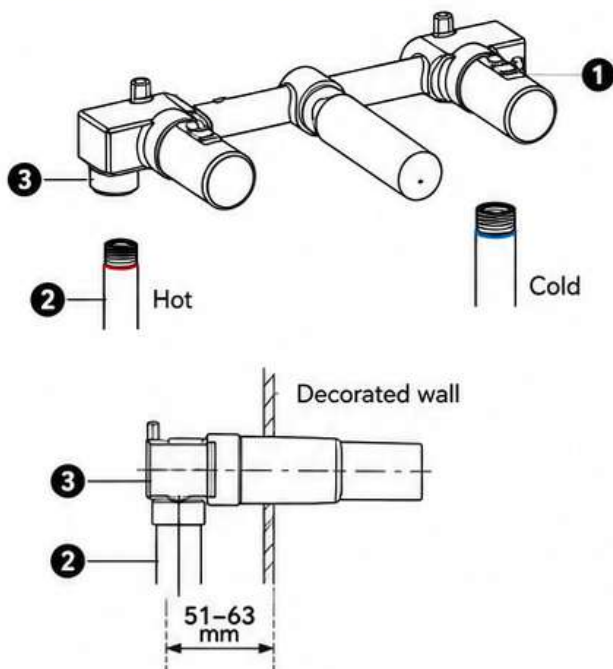

HOW TO INSTALL A HYBRID FAUCET

- 1 Choose an appropriate height to install the mixing valve. Drill a suitable hole in the wall and embed the mixing valve into the wall, ensuring the protective sleeve faces forward. Do not remove the protective sleeve at this stage.
- 2 Connect the cold and hot water supply pipes, each with G1/2 threads, to the left and right water inlets of the mixing valve respectively (the left side for the hot water pipe and the right side for the cold water pipe).
- 3 The distance between the centerline of the water supply pipeline and the finished wall surface should be between 51 mm and 63 mm. Install the hot water pipe with the side marked with a red dot facing left.



HOW TO INSTALL A HANDLE

- 1 Remove the valve body protective sleeve.
- 2 Ensure the valve core is in the closed state. Horizontally install the handle assembly (8) onto the fixing ring (5), adjusting the handle (8) to the direction shown in the diagram.
- 3 Use a hex key (10) to tighten the screw (9) to secure the handle assembly.



HOW TO INSTALL AN OUTLET

- 1 Remove the protective cover from the water outlet.
- 2 First, fit the (13) decorative cover onto the water spout and adjust its position.
- 3 Then, wrap tape around the (14) water spout, screw it into the water outlet, and adjust its position (ensuring the outlet faces downward). Afterward, press the decorative cover against the wall surface to complete the installation.



MAINTENANCE INSTRUCTIONS:

To keep the faucet bright, follow the care instructions below:

1. For regular use, simply rinse the faucet with clean water and wipe it dry with a soft cotton cloth.
2. If stubborn stains or film remain on the faucet surface, use a mild liquid detergent or colorless glass cleaner. After cleaning, rinse the faucet immediately and dry it with a soft cotton cloth.
3. Do not use abrasive cleaners, sandpaper, or any rough tools to scrub the faucet.
4. Avoid cleaning the faucet with any acidic cleaners, polishing abrasives, harsh cleaning agents, soap, or similar products.

