



PRODUCT OVERVIEW

MWA-0003

Wall-Mounted Basin Mixer · Mixers

OVERALL PROJECTION
197 mm

SPOUT PROJECTION
165 mm

SPOUT CENTRE DISTANCE
100 mm

SPOUT THICKNESS
11 mm

INSTALLATION
Wall-mounted

CONTROL
Single-lever

PRODUCT SPECS

01

- Wall-mounted basin design
- Single-lever operation
- Architectural rectangular spout
- Cylindrical control body
- Slim vertical lever
- Square wall plates
- Brushed metallic finish
- Clean geometric silhouette

FINISH VARIANTS

02


	Macaron Green	MWA-0003-MG
	Pickaxe Gold – Brushed	MWA-0003-PGC
	Pickaxe Gold – Brushed	MWA-0003-PG
	Rose Gold – Brushed	MWA-0003-RG
	Morandi Purple – Matte	MWA-0003-MP
	Rose Gold Mirror	MWA-0003-RGM
	Pickaxe Gold Mirror	MWA-0003-PGM
	Vibrant Bronze – Brushed	MWA-0003-BV
	Bright Silver – Brushed	MWA-0003-BS

PRODUCT DESCRIPTION

A contemporary wall-mounted basin mixer characterized by a strong architectural composition of flat rectangular planes and cylindrical detailing. The elongated rectangular spout projects from a square wall plate, while the cylindrical control body and slim vertical lever create a deliberate contrast of geometric forms. The Brushed Gold finish adds warmth and depth to the precise silhouette, highlighting the fine linear texture across the surfaces. Designed as a coordinated statement piece, the mixer brings a refined contemporary character to minimalist and luxury bathroom interiors.

DIMENSIONAL DRAWING

MM

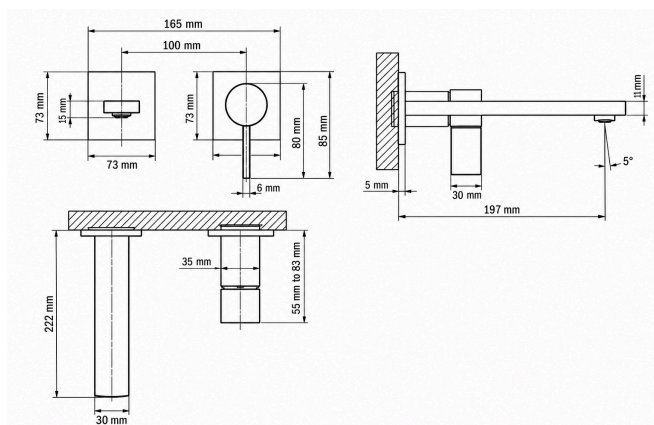

All dimensions are shown in millimetres unless otherwise stated. Site conditions, cut-out, trap system and mixer clearance should be verified before installation.

TECHNICAL DATA

03

Overall projection	197 mm
Spout projection	165 mm
Spout centre distance	100 mm
Spout thickness	11 mm
Installation	Wall-mounted
Control	Single-lever
Product type	Wall-mounted basin mixer
Finish	Brushed Gold
Connection	G1/2"
Spout width	30 mm
Spout outlet angle	5°
Control escutcheon width	73 mm
Control escutcheon height	73 mm
Spout mounting thickness	5 mm
Spout body depth	85 mm
Spout outlet position	80 mm
Spout edge thickness	11 mm
Spout radius	R2 mm
Control body diameter	Ø30 mm
Lever thickness	6 mm
Mounting bracket thickness	5 mm

CERTIFICATIONS & STANDARDS

04

