



BASIN FAUCET

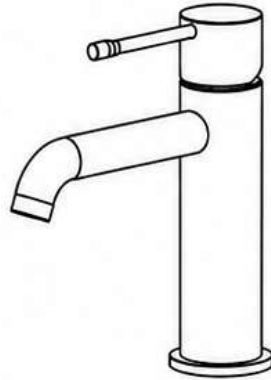


INSTRUCTIONS FOR USE:

- 1 The internal structural parts of the faucet have been professionally assembled, inspected, and tested at the factory. Do not disassemble it on your own, as this may affect the functionality and lifespan of the faucet.
- 2 Before installing the faucet, be sure to open the main valve to flush out any debris such as iron filings or hemp fibers from the water pipes. This prevents clogging and ensures proper water flow and functionality.
- 3 Install the faucet according to the product installation diagram to ensure correct installation. Do not force installation, as this may damage the faucet components.
- 4 The faucet must be correctly connected to the cold and hot water supply lines. When facing the faucet, the left side connects to hot water, and the right side connects to cold water.
- 5 After installation, check all connections to ensure they are tight and there is no leakage at the interface between the faucet and water pipes. Then, open the main water inlet valve to flush the pipes for one minute.
- 6 For any questions regarding the use or installation of the faucet, please contact the dealer.

PRODUCT DETAILS:

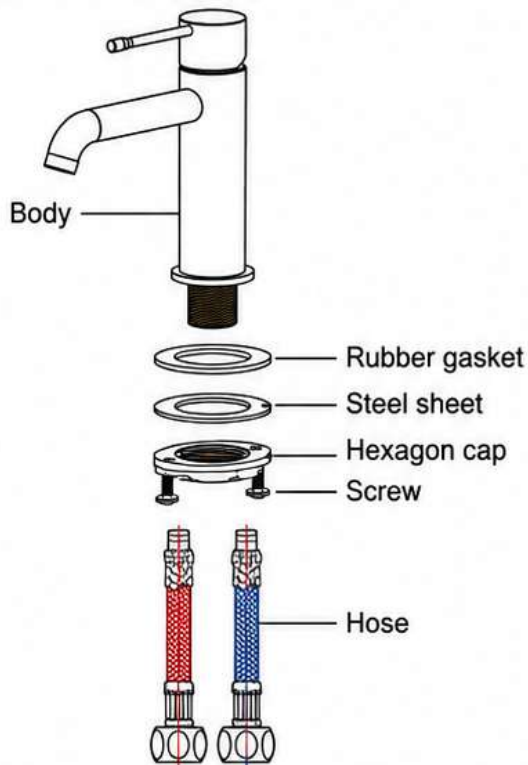


DIMENSION DRAWING: Single Hole Basin Faucet

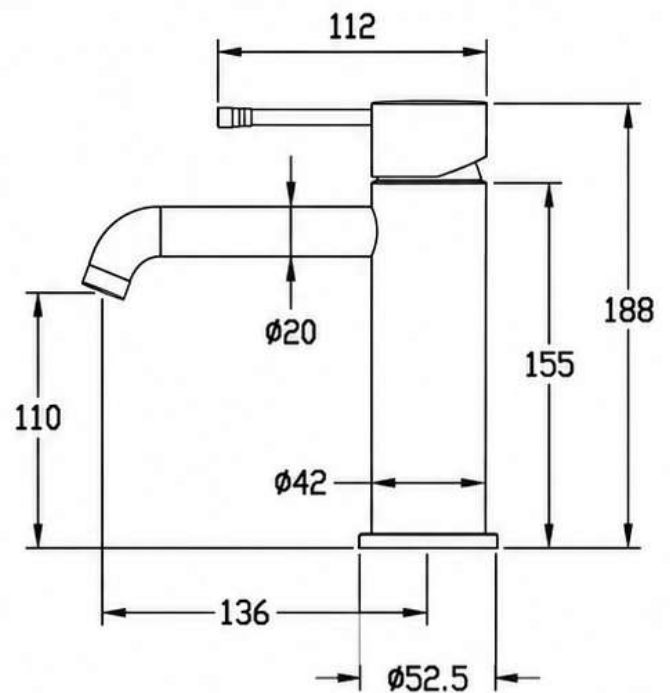


INSTALLATION STEPS


DIMENSION DRAWING: Medium-High Single Hole Basin Faucet

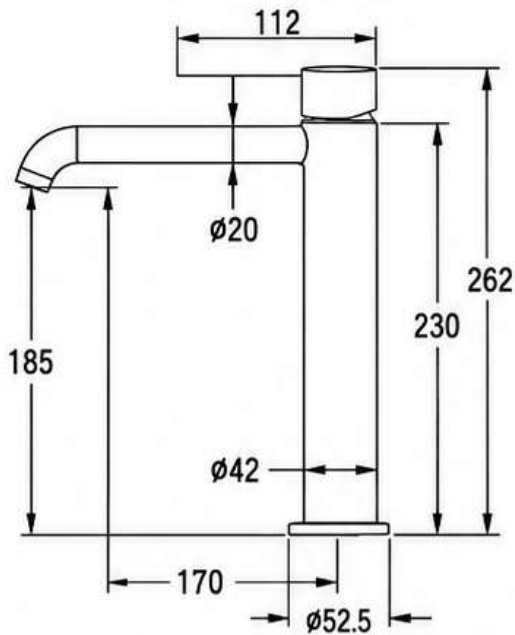


DIMENSION DRAWING: High Single Hole Basin Faucet

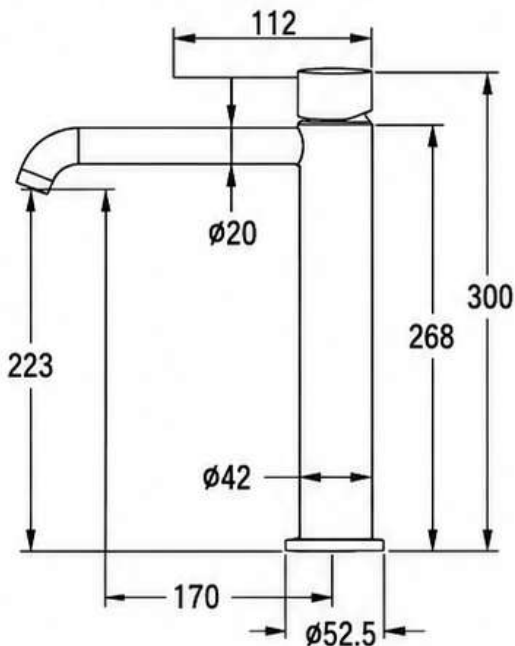



HOW TO INSTALL A WATER OUTLET NOZZLE

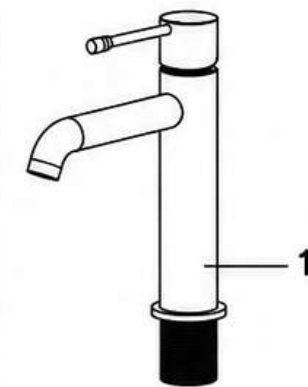

- 1 Insert the main body (1) from directly above the washbasin and install it onto the basin. Adjust the position of the water outlet so that it faces directly forward.



- 2 From below the washbasin, place the rubber gasket (2) and the stainless steel gasket (3) (with the rubber gasket on top) onto the threaded pipe. Screw the nut (4) into the threaded pipe and tighten it with a wrench. Then, secure the screw (5) tightly.

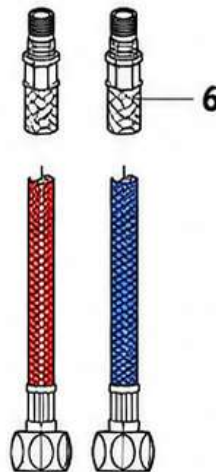

- 3 Connect the hose (6) to the angle valves accordingly (connect the red hose to the hot water supply and the blue hose to the cold water supply). If the faucet, please contact the dealer.

MAINTENANCE INSTRUCTIONS:

To keep the faucet bright, follow the care instructions below:

1. For regular use, simply rinse the faucet with clean water and wipe it dry with a soft cotton cloth.
2. If stubborn stains or film remain on the faucet surface, use a mild liquid detergent or colorless glass cleaner. After cleaning, rinse the faucet immediately and dry it with a soft cotton cloth.
3. Do not use abrasive cleaners, sandpaper, or any rough tools to scrub the faucet.
4. Avoid cleaning the faucet with any acidic cleaners, polishing abrasives, harsh cleaning agents, soap, or similar products.

