oceandell

TECHNICAL FACT SHEET



PRODUCT OVERVIEW

TVW-0002

Urinal Flush · Toilets & Bidets

OVERALL WIDTH **71.5 mm**	BODY HEIGHT **62 mm**
BODY DEPTH **66 mm**	INLET CONNECTION **G1/2**
OUTLET DIAMETER **13 mm**	MATERIAL **Copper alloy 58 ±**

PRODUCT SPECS 01

- Urinal flush valve
- Static-pressure operation
- G1/2 water supply connection
- Adjustable inlet water-flow control
- Copper alloy construction
- Nickel chrome plated surface
- Suitable for urinal installation
- Flush volume from 500 ml to 2 L per flush

FINISH VARIANTS 02


Nickel Chrome	TVW-0002

PRODUCT DESCRIPTION

Urinal flush valve designed for pressure-operated urinal installations. The compact valve body incorporates an adjustable water-flow control and durable internal components designed for reliable operation under different water conditions, with a nickel chrome surface finish.

DIMENSIONAL DRAWING

MM

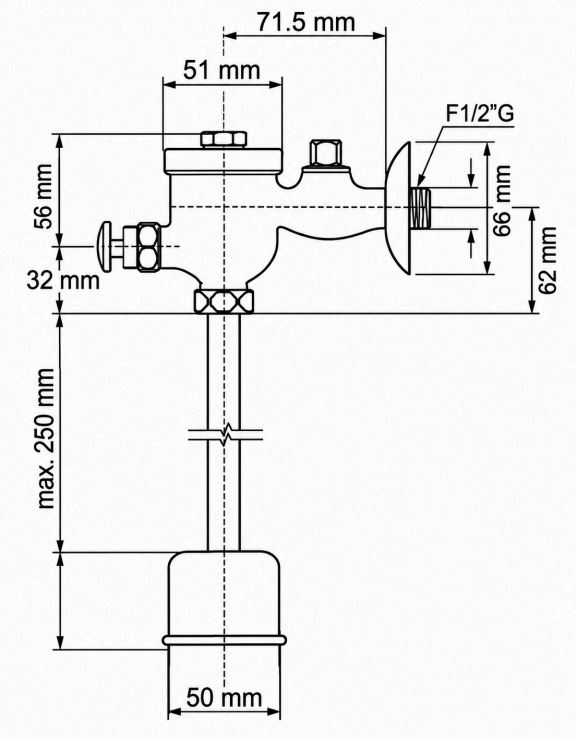

All dimensions are shown in millimetres unless otherwise stated. Site conditions, cut-out, trap system and mixer clearance should be verified before installation.

TECHNICAL DATA

03

Overall width	**71.5 mm**
Body height	**62 mm**
Body depth	**66 mm**
Upper connection height	**56 mm**
Upper connection width	**51 mm**
Inlet connection	**G1/2**
Outlet diameter	**13 mm**
Adjustment projection	**32 mm**
Maximum pipe length	**250 mm**
Lower cover diameter	**50 mm**
Material	**Copper alloy 58 ±**
Finish	**Chrome**
Operating pressure	**1 kg/cm²**
Maximum water pressure	**10 bar**
Product type	**Urinal flush valve**
Flush volume	**500 ml–2 L per flush**
Operation	**Static pressure**
Installation	**Urinal mounted**

CERTIFICATIONS & STANDARDS

04

ISO9001